



TRUFIT™ PRE-NOTCHED DRIP EDGE

Pre-cut Precision




Installers have to be trained to hand notch drip edge in the field. Fish-mouthing can occur when the nose of the drip edge is pinched from incorrect handling.

TruFit™ Pre-Notched Drip Edge is dual hemmed for strength and clean lines. Pre-Notched for a perfect fit, easy alignment, requires no training and has a 2" overlap to meet code.


- 2" Overlap to meet U.S. Building Code
- Patented TruFit™ Technology reduces buckling that leads to call backs
- Dual hemmed for easier handling



Patented TruFit Technology
to reduce buckling.



Dual hemmed for cleaner
lines, ease of handling and
it eliminates exposed edges.



Angled overlap for
a closed seam.

Pre-Notched T-Style Drip Edge with TruFit™



FUNCTION

Perfect fit, easy alignment and angled overlap for a closed seam.
No hand-notching needed.

AVAILABLE OPTIONS

See Spec Guide for all option details.

Aluminum (0.016"): 1.5T016
Aluminum (0.019"): 1T, 1.5T, 1.5T12, 1.5XT, 1.75T10, 1.75T12, 2T, 2T12
Steel (0.013"): S1T28G, S1.25T28G, S1.5T28G, S1.5TEL28G, S2T28G
Steel (0.016"): 1TTPGAL, 1.5TTPGAL, 1.75TTPGAL, 2TTPGAL
Steel (0.019"): 1.5TNGAL_019

MATERIAL AVAILABILITY

Aluminum & Steel

COATING

Q800 TuffTech™ or Mill

COLOR AVAILABILITY

Varies by profile.
1.5T, 1.5T12, 2T & 2T12 available in all System Colors.
Contact Customer Service for complete color availability.

THICKNESS

Aluminum: 0.016", 0.019"
Steel: 0.013", 0.016", 0.019"

WARRANTY

Lifetime Limited Warranty

PATENTS

U.S. Patents: 8,281,521 | 8,683,695 | 9,370,814
Canadian Patent: 2,768,934

CERTIFICATION & RATING

Meets ASTM B209 standards

INSTALLATION NOTES


Go to QualityEdge.com/Resources for detailed installation information.

BUILDING CODES AND BEST PRACTICES


507.2.8.3, R905.2.8.5 Drip edge. A drip edge shall be provided at eaves and rake edges of shingle roofs. Adjacent segments of the drip edge shall be lapped not less than 2 inches. The vertical leg of drip edges shall not be less than 1½ inches in width... and shall extend back on the roof not less than 2 inches. **SOURCE: IBC & IRC 2018**

R905.2.8.6 Drip edge. Provide drip edge at eaves and gables of shingle roofs. Overlap to be a minimum of 3 inches. Eave drip edges shall extend ½ inch below sheathing and extend back on the roof a minimum of 2 inches. **SOURCE: Florida RBC**

ALUMINUM SYSTEM COLORS

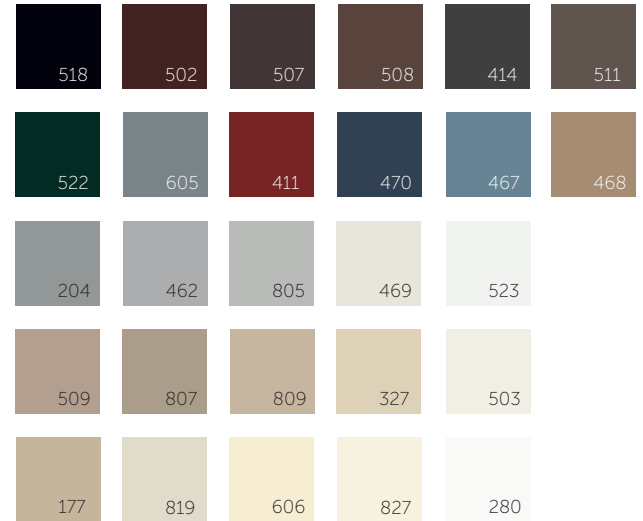

STEEL COLORS

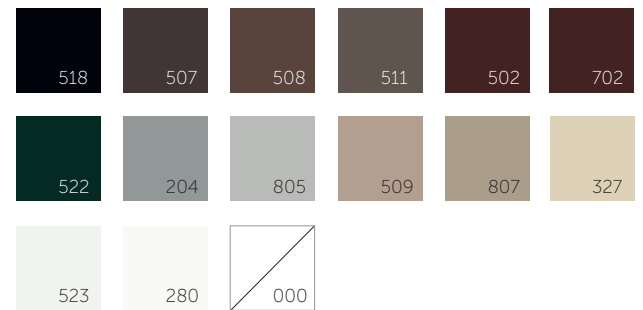

ALUMINUM SYSTEM COLORS: 518 Black [BLK], 502 Brown [B], 507 Mocha [MOC], 508 Musket [MUS], 414 Ironstone [IRNS], 511 Terratone [TER], 522 Forest [FOR], 605 Eldridge Gray [EG], 411 Cottage Red [CRED], 470 Midnight Blue [MNBLU], 467 Evening Shade [EVES], 468 Fawn [FAWN], 204 Granite [GRT204], 462 Silver Lining [SVRL], 805 Pewter [P805], 469 Fresh Canvas [FCAN], 523 Snowmist [SMT], 509 Norwood [NOR], 807 Clay [C], 809 Wicker [WIC], 327 Desert Tan [DTAN], 503 Eggshell [EGG], 177 Sandy Beige [SB177], 819 Herringbone [HER], 606 Cozy Cottage [CC], 827 Champagne [CAB], 280 White [W]

STEEL COLORS: 518 Black [BLK], 507 Mocha [MOC], 508 Musket [MUS], 511 Terratone [TER], 502 Brown [B], 702 Low Gloss Brown [LGB], 522 Forest [FOR], 204 Granite [GRT204], 805 Pewter [P805], 509 Norwood [NOR], 807 Clay [C], 327 Desert Tan [DTAN], 523 Snowmist [SMT], 280 White [W], 000 Mill [M]

Although we make every effort to ensure color accuracy in our printing process, your final products may not be an exact match to those displayed.



Contact your Customer Service or Sales Representative to order:

888.784.0878

QualityEdge.com/roofing-accessories/drip-edge

TFPNFLYER_0323