






TRUVENT HIDDEN VENT SOFFIT IN SILVER LINING



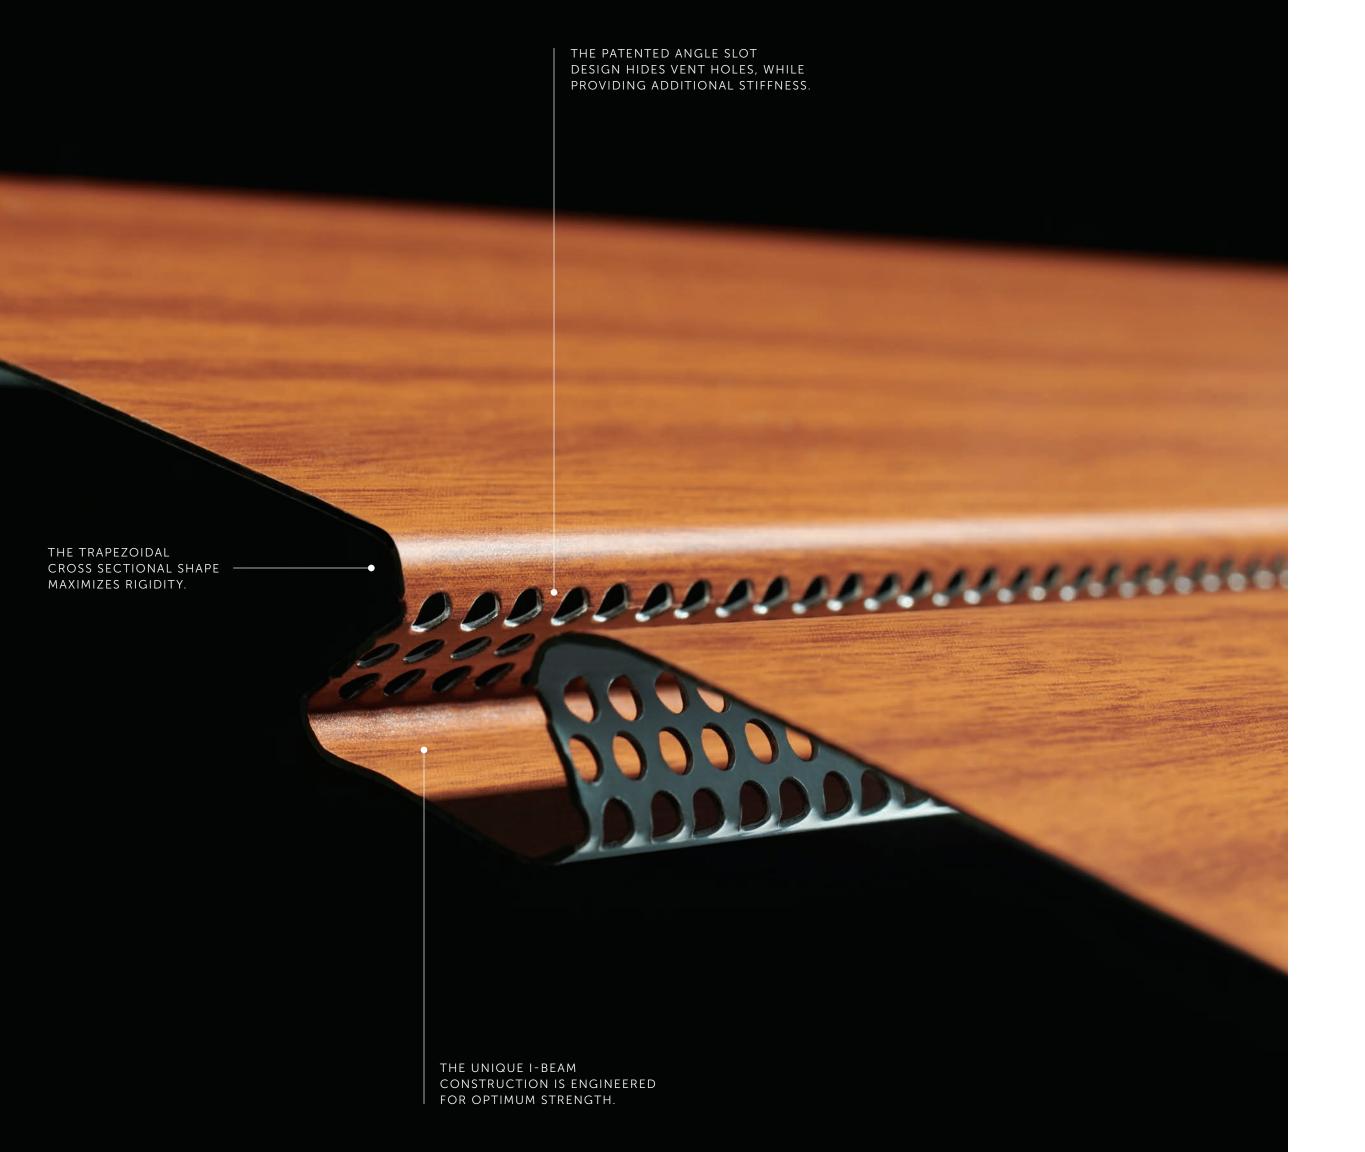


PATENTED OVERHANG INNOVATION

TruVent Hidden Vent soffit from Quality Edge, a groundbreaking innovation in overhang design.

As the first of its kind, TruVent ingeniously conceals the vents without compromising performance, setting a new standard in home ventilation. Since its debut, many have attempted to replicate our patented design, but none have matched the original's excellence. Our pioneering approach not only enhances the aesthetic appeal of homes but also ensures optimal airflow and protection.




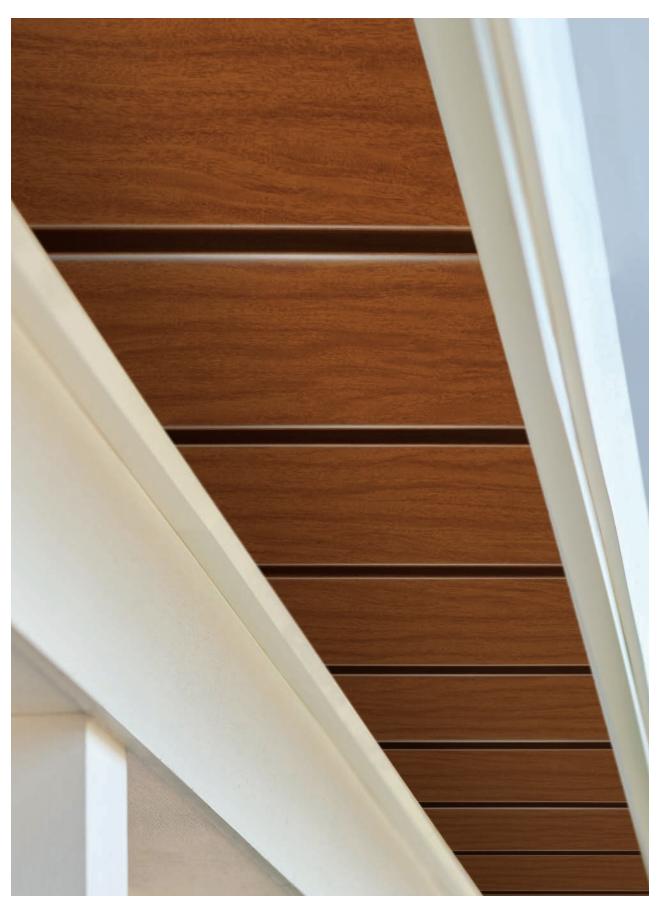


TRUVENT HIDDEN VENT SOFFIT IN MEDIUM TEAK





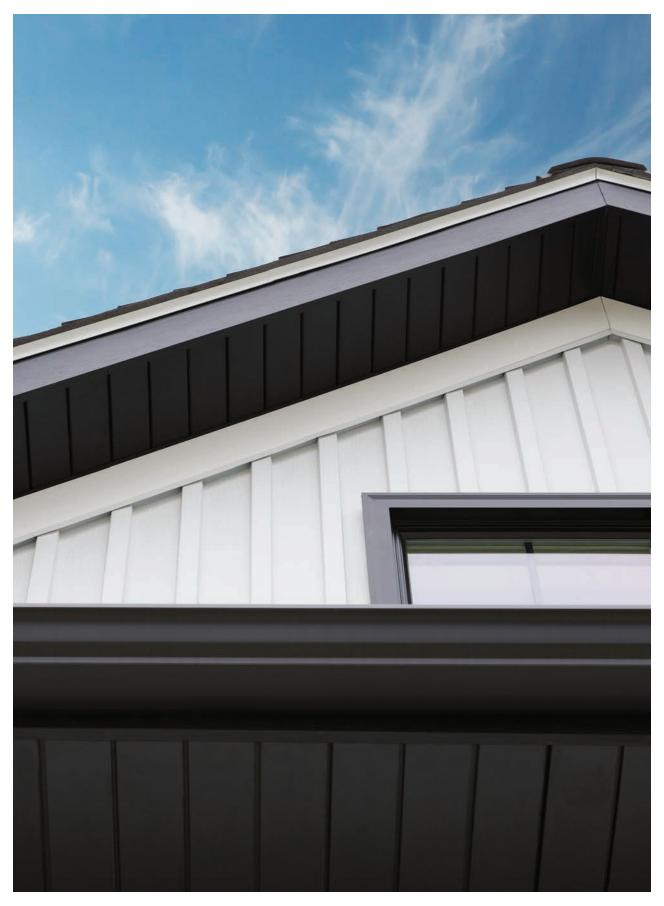


TRUVENT HIDDEN VENT SOFFIT IN BLACK

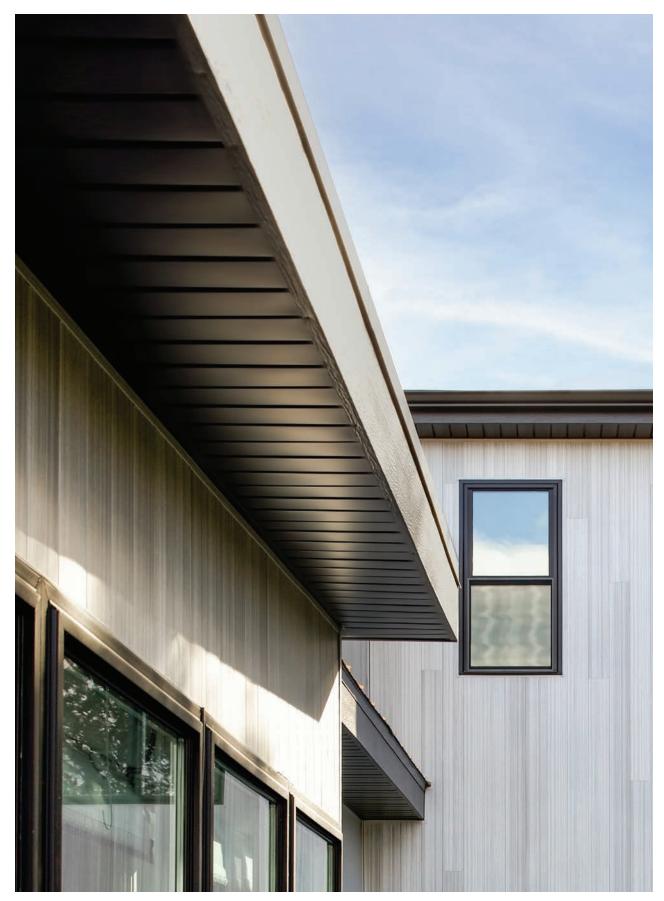


TRUVENT HIDDEN VENT SOFFIT IN BLACK





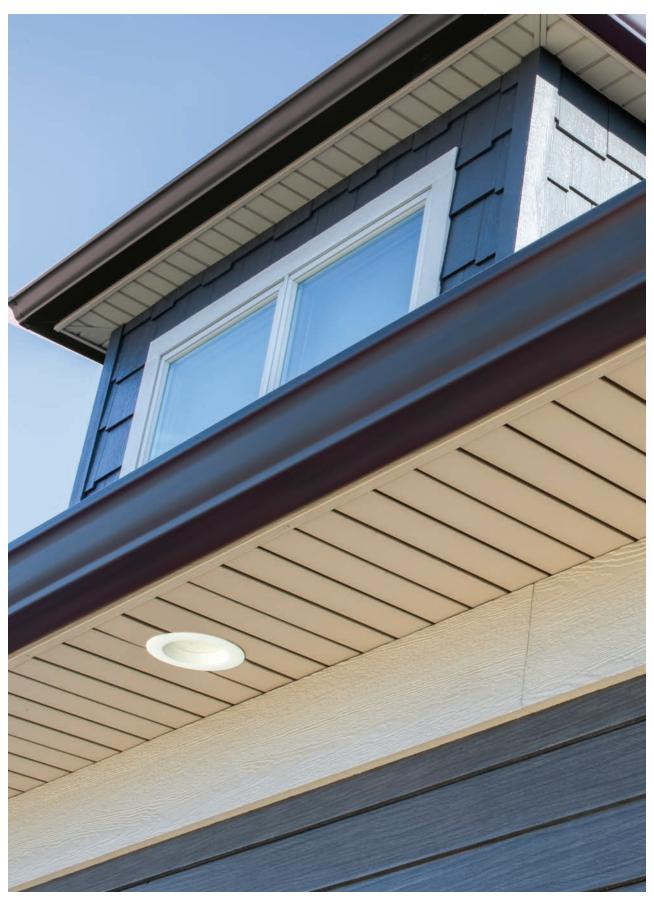

TRUVENT HIDDEN VENT SOFFIT IN DESERT TAN

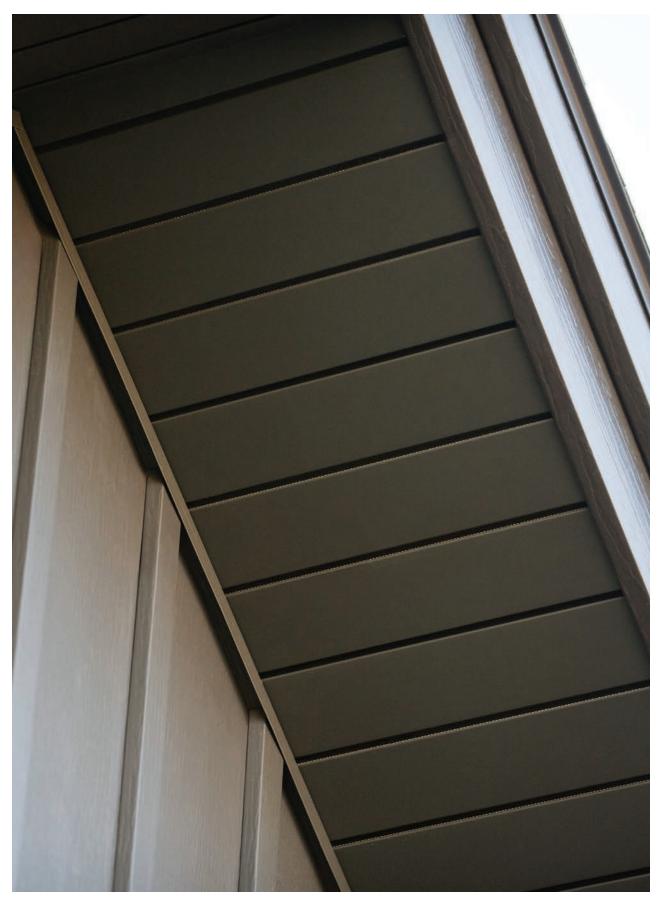

TRUVENT HIDDEN VENT SOFFIT IN IRONSTONE









TRUVENT HIDDEN VENT SOFFIT IN FOREST

FROM SOFT TO STRIKING


Our collection offers 27 solid colors ranging from neutrals to bold hues, along with two new woodgrain options, ensuring a broad selection to fit any home style and design. Whether you're looking to complement your siding or roofing with subtle elegance or make a bold statement with your overhang, our color options provide the perfect solution. Each shade is meticulously crafted to enhance the aesthetic appeal of your home, offering versatility and timeless beauty. Transform your home's exterior with colors that not only match but elevate your design vision.



Extreme Weather Durability


Fire Resistant




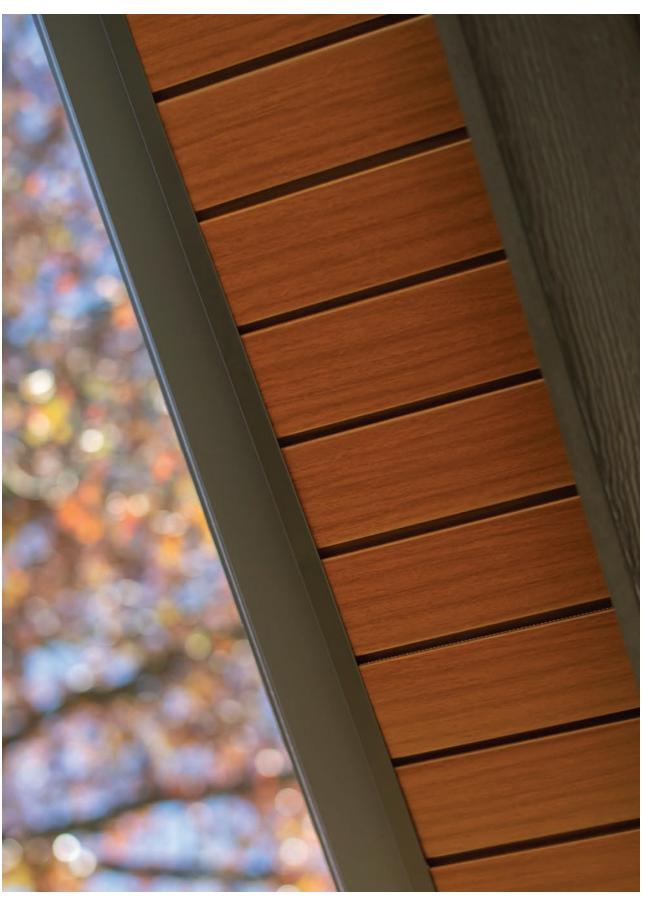


TRUVENT HIDDEN VENT SOFFIT IN MEDIUM TEAK

TRUVENT® WOODGRAIN COLORS

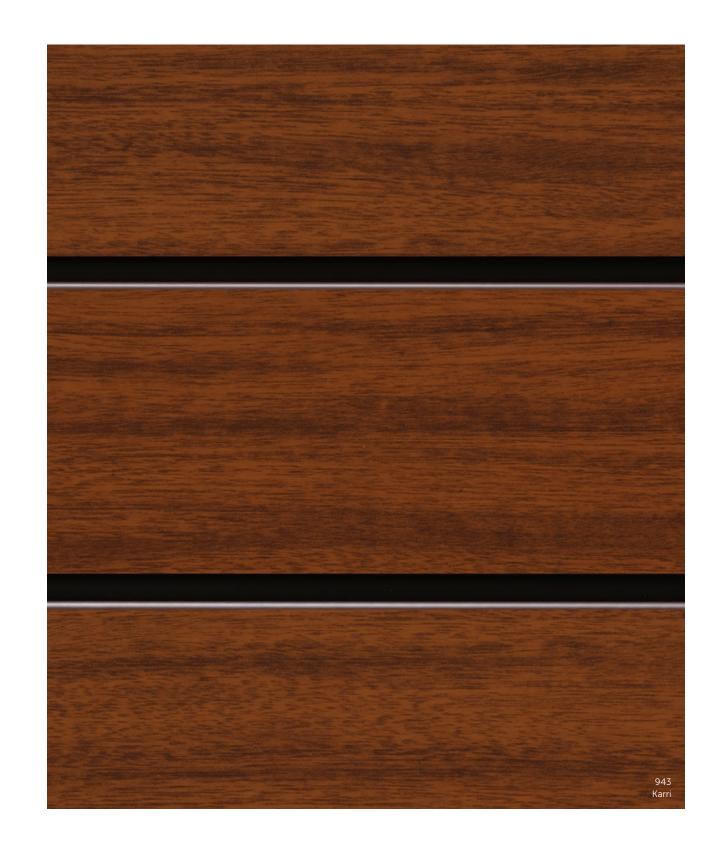

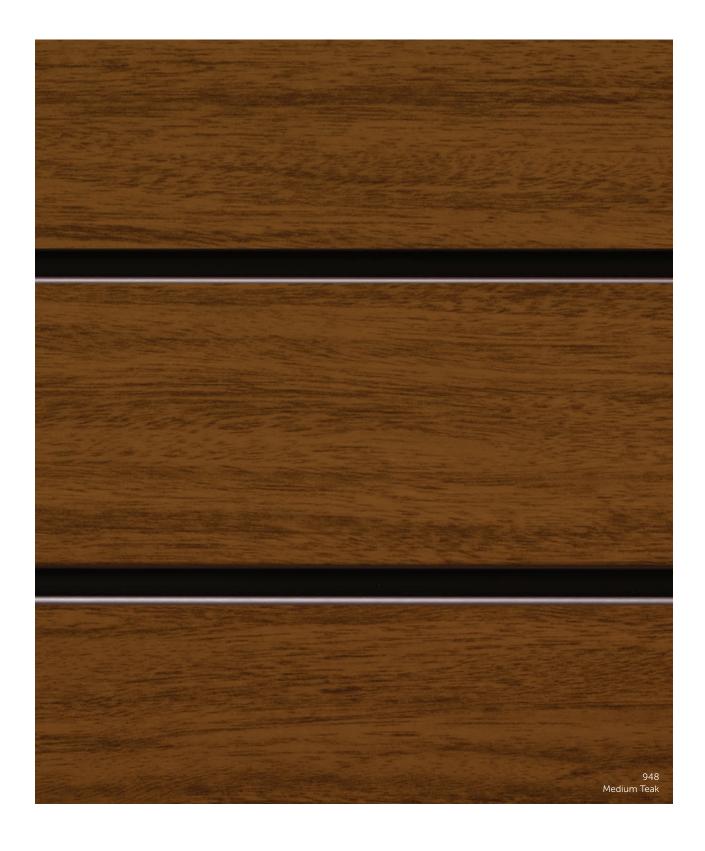


TRUVENT® SOLID COLORS

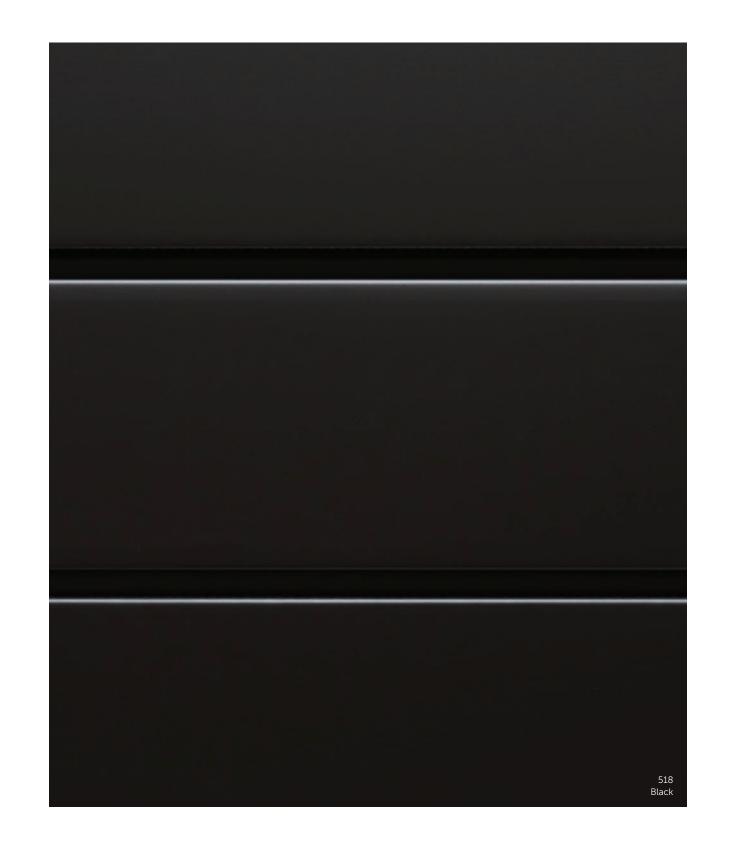





TRUVENT | SPECIFICATIONS



PRODUCT LINE

Aluminum Soffit

MATERIAL

Aluminum

THICKNESS

0.019"

DIMENSIONS

Height: 12" Length: 12'

NFA

11.0

CT LINE COATING

ffit Q800 TuffTech™ coating is applied at 0.6–0.8 mils, a pencil hardness of F-2H (ASTM D 3363) and flexibility of

F-2H (ASTM D 3363) and flexibility of 1-2T. Specular gloss 60° ASTM D 523 is \pm 5% of specification.

PATENTS

U.S. Patent Nos.: 7,137,224 Canadian Patent: 2,496,496

TECHNICAL SUPPORT

Complete technical information and literature is available at:

QualityEdge.com/Support

INSTALLATION SUPPORT

Installation information is available at:
QualityEdge.com/Support

WARRANTY

For complete warranty information, registration and claims, visit:

QualityEdge.com/Warranties


BUILDING CODES & BEST PRACTICES

"Proper ventilation [more in-take through soffit than exhaust through roof vents] can lower the attic temperature by as much as 50°F, which significantly reduces the home's heating and cooling, demands. Ridge and soffit vents help keep the attic space well-ventilated, preventing a build-up of moisture and reducing heat in summer. These vents can prolong the life of the roof."

Typical one foot soffit overhangs should have at least an 11 NFA, so when used on both sides of the home will have a combined NFA of 22 to draw the air flow needed to work with a ridge vent system.

SOURCE: U.S. Department of Energy

https://web.archive.org/web/20120925234940/http://www1.eere.energy.gov/buildings/openhouse/soffit_vents.html

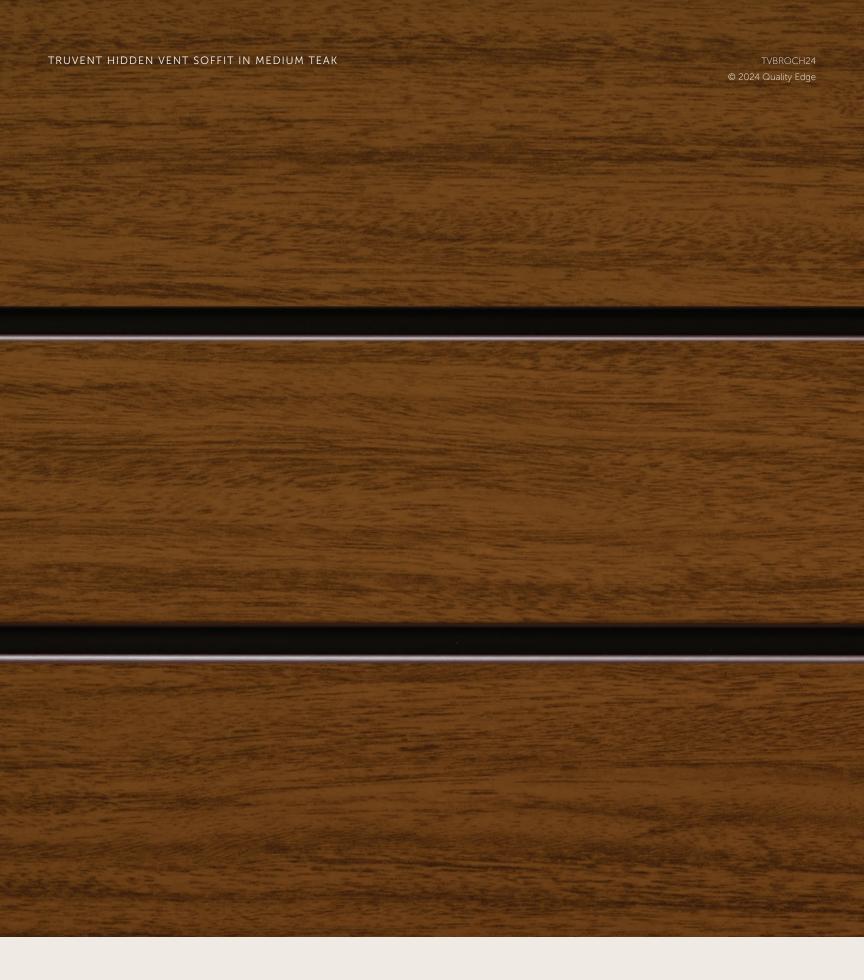



GRAND RAPIDS • DALLAS • SAVANNAH